

# Lifting & Spreader Beams


## Model 18 - Fixed Twin Basket Sling Lifting Beam



**QUICKSHIP PROGRAM**

### PRODUCT FEATURES:

- Designed to be used with slings in a basket hitch.
- Provides greatest clearance in low headroom applications.
- Two sets of bent bar hooks are standard on units with a spread of 6' and greater.
- Spread 2 is 1/2 of spread 1.
- Hooks are designed to handle up to a 2" sling eye width.
- Complies with ASME standards.

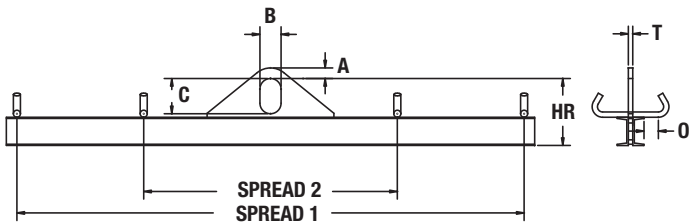

### SPECIFICATIONS

Capacity (tons)	Model Number HR Headroom (in.) Weight (lbs.)	Spread (feet)						Other Dimensions (in.)
		3*	4*	6	8	10	12	
1/2	<b>Model Number</b>	<b>18-1/2-3</b>	<b>18-1/2-4</b>	<b>18-1/2-6</b>	<b>18-1/2-8</b>	<b>18-1/2-10</b>	<b>18-1/2-12</b>	A=7/8 T=3/4
	HR Headroom	8-1/2	8-1/2	8-1/2	8-1/2	8-1/2	9-1/2	B=3 O=2
	Weight	40	48	78	95	113	171	C=5
1	<b>Model Number</b>	<b>18-1-3</b>	<b>18-1-4</b>	<b>18-1-6</b>	<b>18-1-8</b>	<b>18-1-10</b>	<b>18-1-12</b>	A=7/8 T=3/4
	HR Headroom	8-1/2	8-1/2	9-1/2	10-1/2	10-1/2	11-1/2	B=3 O=2
	Weight	40	48	93	136	175	239	C=5
2	<b>Model Number</b>	<b>18-2-3</b>	<b>18-2-4</b>	<b>18-2-6</b>	<b>18-2-8</b>	<b>18-2-10</b>	<b>18-2-12</b>	A=7/8 T=3/4
	HR Headroom	9-1/2	10-1/2	10-1/2	11-1/2	12-1/2	13-1/2	B=3 O=2
	Weight	52	75	139	169	246	326	C=5
5	<b>Model Number</b>	<b>18-5-3</b>	<b>18-5-4</b>	<b>18-5-6</b>	<b>18-5-8</b>	<b>18-5-10</b>	<b>18-5-12</b>	A=2 T=1-1/4
	HR Headroom	13-1/2	14-1/2	15-1/2	16-1/2	17-1/2	19-1/2	B=4 O=2
	Weight	104	135	211	310	423	618	C=7
7 1/2	<b>Model Number</b>	<b>18-7 1/2-3</b>	<b>18-7 1/2-4</b>	<b>18-7 1/2-6</b>	<b>18-7 1/2-8</b>			A=2 T=1-1/4
	HR Headroom	12	14	15	17			B=4 O=2
	Weight	125	185	315	475			C=7

\* 3' and 4' beams are provided with one set of bent bar hooks.

## Operation

